
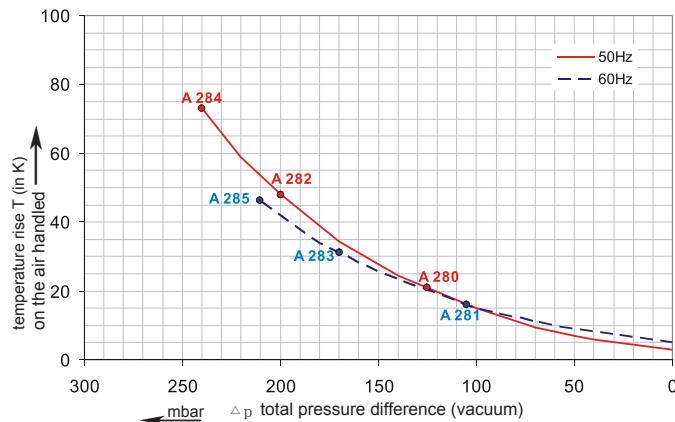
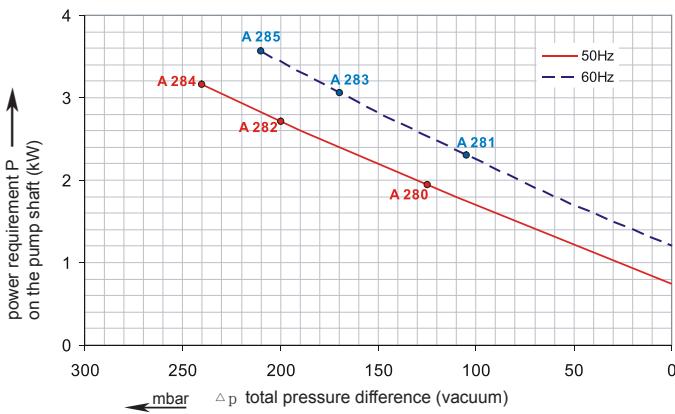





**GREENCO**

## G-2RB

Performance curve for Vacuum pump

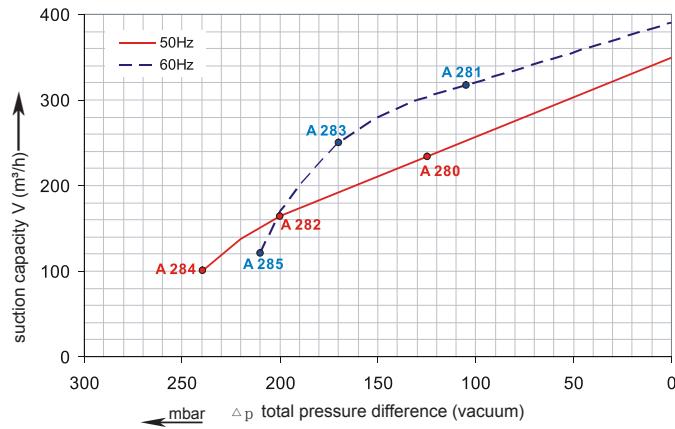

Performance curve for Compressor

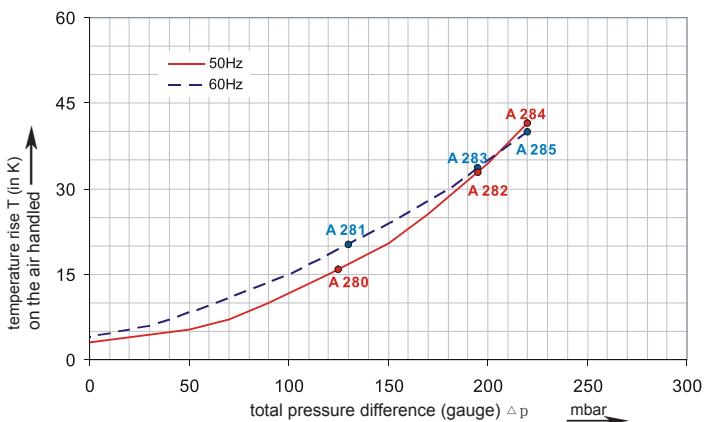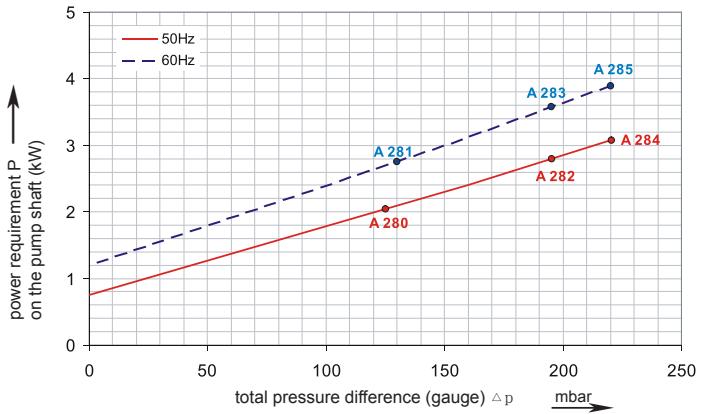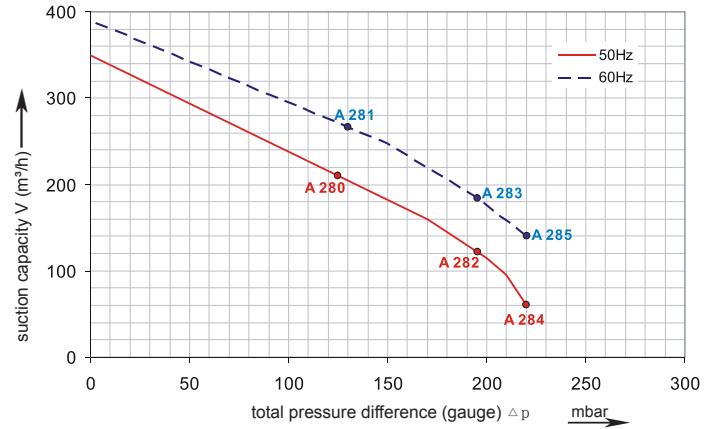

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %.  
The total pressure differences are valid for suction and ambient temperatures up to 25 °C.  
For other conditions please confer with us.

Each G-2RB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.

## Selection and ordering data

### Type 2RB630

Curve No.	Order No.	Frequency Hz	Rated power kW	Input voltage V	Input current A	Permissible total differential pressure <sup>2)</sup> Vacuum mbar	Compressor mbar	Sound pressure level <sup>3)</sup> dB(A)	Weight ca. kg
-----------	-----------	--------------	----------------	-----------------	-----------------	--	-----------------	--	---------------

3~ 50/60 Hz IP55 insulation material class F 1)

A 280	2RB630-7AH06	50	1.6	200D ... 240D	345Y...415Y	8.5D	4.9Y	-125	125	70	10
A 281	2RB630-7AH06	60	2.05	220D ... 275D	380Y...480Y	8.8D	5.1Y	-105	130	73	10
A 282	2RB630-7AH16	50	2.2	200D ... 240D	345Y...415Y	9.7D	5.6Y	-200	195	70	11
A 283	2RB630-7AH16	60	2.55	220D ... 275D	380Y...480Y	10.3D	6.0Y	-170	195	73	11
A 284	2RB630-7AH26	50	3.0	200D ... 240D	345Y...415Y	12.5D	7.2Y	-240	220	70	12
A 285	2RB630-7AH26	60	3.45	220D ... 275D	380Y...480Y	12.6D	7.3Y	-210	220	73	12



Other voltage ranges		
2RB 630-7AH □.□		
<b>50Hz</b>	<b>60Hz</b>	↑ ↑
3~		
185...225 V D/320...390 V Y 200...240 V D/345...415 V Y 345...415 V D	200...240 V D/345...415 V Y 200...275 V D/380...480 V Y 380...480 V D	H 1 H 6 H 7
500 V D	575V D	C 5
Machines according to the ATEX norm 94/4 EG are available for the whole performance range. Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.		
1~		
100 / 200 V 115 / 230 V	100 / 200 V 115 / 230 V	V 4 V 5
230V	230V	A 1

Further voltage range on request; please quote in plain text.

All G-2RB achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuous operating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.