


Data sheet 2RB 830

Side channel blower with IE2-motors






IE2



Performance curve for Vacuum pump

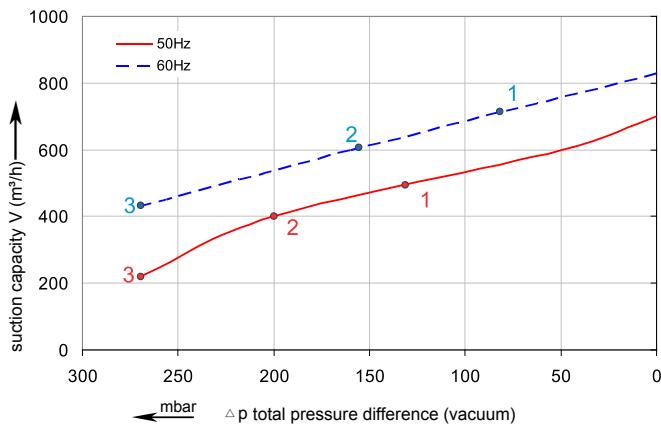

Performance curve for Compressor

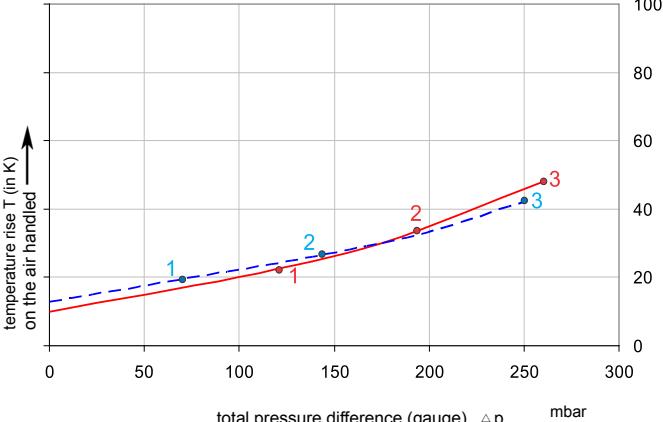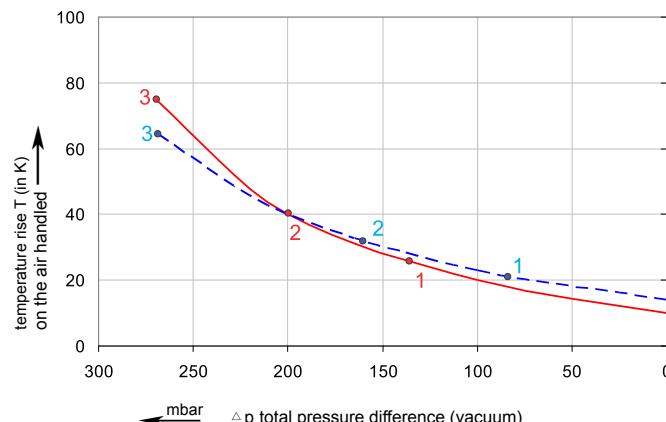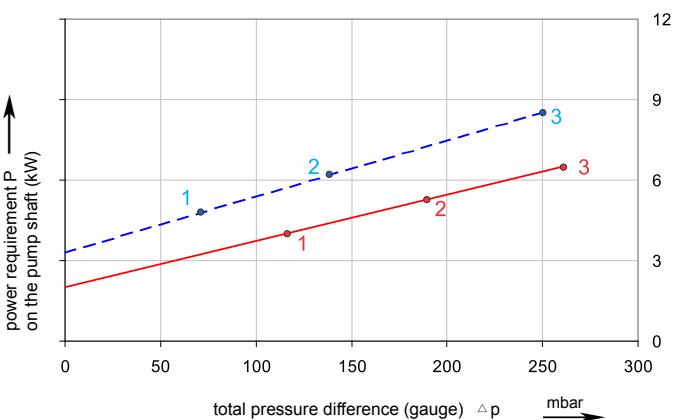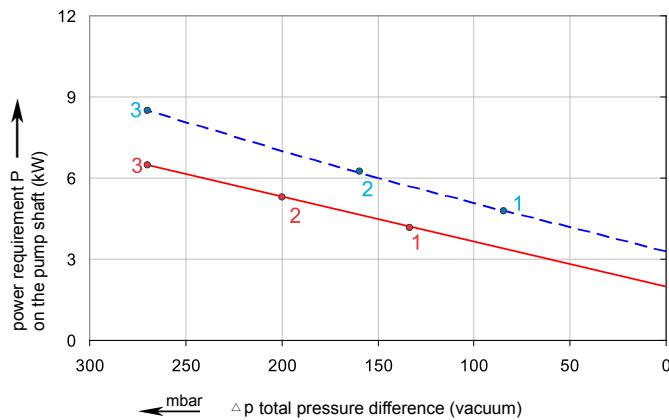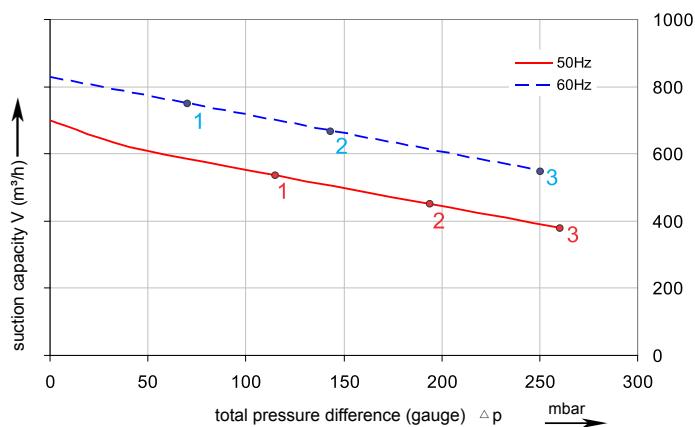

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %.
The total pressure differences are valid for suction and ambient temperatures up to 25 °C.
For other conditions please confer with us.

Each 2RB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.

Selection and ordering data

Type 2RB 830

Curve No.	Order No.	Fre-	Rated	Input voltage	Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
		quency	power			Vacuum mbar	Compressor mbar		
3~ 50/60 Hz IP55 insulation material class F ,UL 1004-1									
1	2RB 830-7AT07	50	4.00	350 - 450 D / 610 - 725Y	8.40D/4.80Y	-130	120	70	57
		60	4.60	400 - 500D / 690 - 725Y	8.20D/4.70Y	-80	70	74	57
2	2RB 830-7AT17	50	5.50	350 - 450 D / 610 - 725 Y	11.1D/6.40Y	-200	190	70	66
		60	6.30	400 - 500D / 690 - 725Y	11.0D/6.40Y	-160	140	74	66
3	2RB 830-7AT27	50	7.50	350 - 450 D / 610 - 725 Y	15.1D/8.70Y	-270	260	70	70
		60	8.60	400 - 500D / 690 - 725Y	15.3D/8.90Y	-270	250	74	70

1) Relief valves available for limiting differential pressure.

2) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ± 3 dB(A).

All 2RB fulfil the 2006/42/EC(machinery)and 2006/95/EC(low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".

The motors comply with EN 60 034-1 / -2 /-30(IEC 60034) and thermal class F.

The voltage tolerance is $\pm 5\%$.

The frequency tolerance is $\pm 2\%$ maximum.

Other voltage ranges									
50 Hz	50 Hz Voltage range	60 Hz Voltage range	86 Hz (5000 rpm)	2RB...-7.	□ .	□	□	□	□
3-IE2/									
200 V D/345 V Y	180-240 V D /310-415 V Y	200...275 V D/345...480 V Y	-----			T	1		
500VD	450-550 V D	520...600 V D	-----			T	5		
230 V D/400 V Y	200-260 V D /350-450 V Y	230...290 V D/400...500 V Y	400 V D			T	6		
400 V D/690 V Y	350-450 V D /610-725 V Y	400...500 V D/690...725 V Y	-----			T	7		

4) Performance can different if standard motors are used. Please refer to corresponding data sheets.



Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.

GREENCO[®]

Your Ultimate Source for Vacuum and Pressure

ZHEJIANG GREENCO INDUSTRY CO LTD

Rongshi Road Danya Industrial Zone Zeguo
Town Wenling 317523 China
Tel.: +86-576-86428999
Fax: +86-576-86409555
www.greenco.cn
E-mail:greenco@greenco.cn