

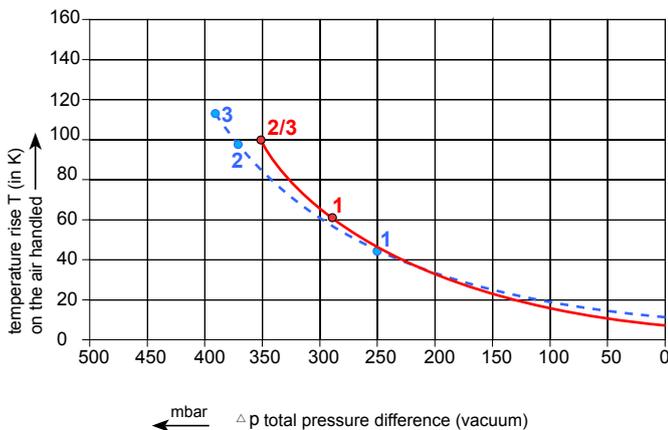


Data sheet 3RB 350-1




Side channel blower with IE2-motors

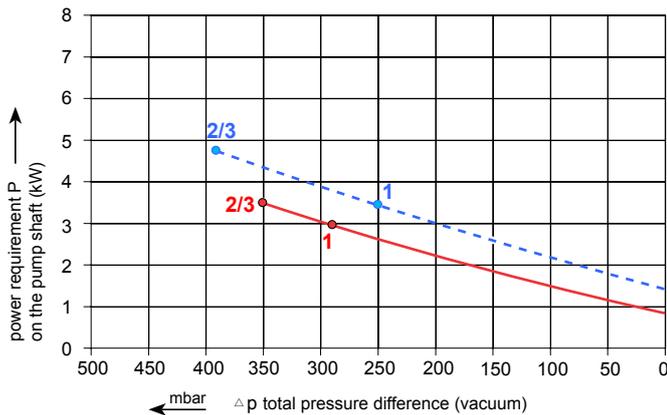

Performance curve for Vacuum pump

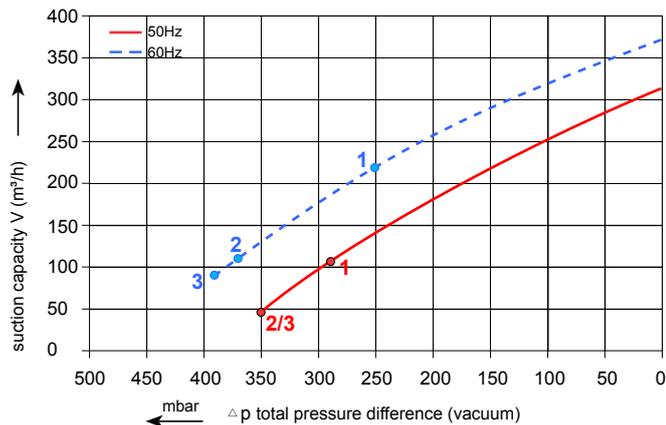

Performance curve for Compressor

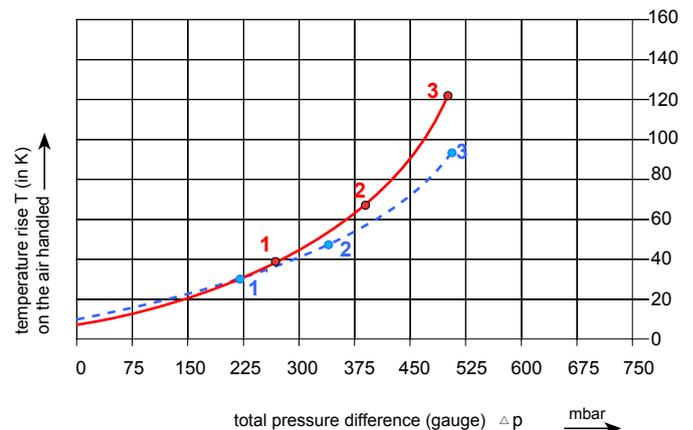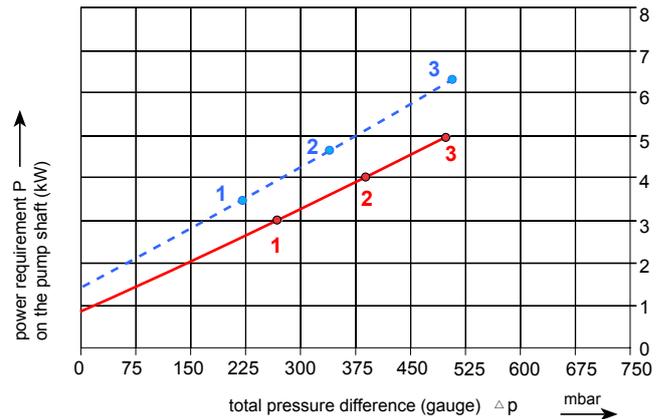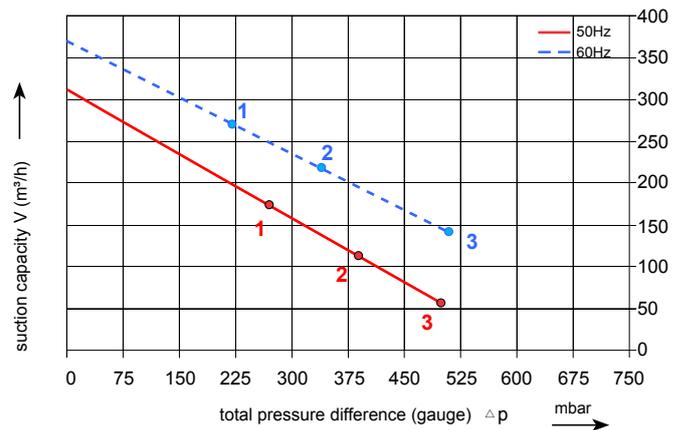

The performance curves are based on air at a temperature of 15 °C and atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each G-3RB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55.

Selection and ordering data

Type 3RB350-1

| Curve No. | Order No. | Frequency | Rated Power | Input voltage | Input current | Permissible total differential pressure ²⁾ | | Sound pressure level ³⁾ | Weight ca. |
|--|----------------|-----------|-------------|---------------------|---------------|---|-----------------|------------------------------------|------------|
| | | | | | | Vacuum mbar | Compressor mbar | | |
| | | Hz | KW | V | A | | | dB(A) | kg |
| 3~ 50/60 Hz IP55 isolation material class F | | | | | | | | | |
| 1 | 3RB 350-1AAT26 | 50 | 3.0 | 200-260 Δ /350-450Y | 11.4 Δ /6.5Y | -290 | 270 | 65 | 54 |
| | | 60 | 3.45 | 230-290 Δ /400-500Y | 10.8 Δ /6.2Y | -250 | 220 | 69 | |
| 2 | 3RB 350-1AAT37 | 50 | 4.0 | 350-450 Δ /610-725Y | 8.4 Δ /4.8Y | -350 | 390 | 66 | 66 |
| | | 60 | 4.6 | 400-500 Δ /690-725Y | 8.2 Δ /4.7Y | -370 | 340 | 70 | |
| 3 | 3RB 350-1AAT47 | 50 | 5.5 | 350-450 Δ /610-725Y | 11.1 Δ /6.4Y | -350 | 500 | 70 | 77 |
| | | 60 | 6.3 | 400-500 Δ /690-725Y | 11.0 Δ /6.4Y | -390 | 510 | 70 | |

1) Relief valves available for limiting differential pressure.

2) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ± 3 dB(A).

All 3RB fulfil the 2006/42/EC(machinery)and 2006/95/EC(low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".

The motors comply with EN 60 034-1 / -2 /-30(IEC 60034) and thermal class F

The voltage tolerance is +/- 5%.

The frequency tolerance is +/- 2% maximum.

Other voltage ranges

| 50 Hz | 50 Hz Voltage range | 60 Hz Voltage range | 86 Hz(5000 rpm) | 100 Hz(6000 rpm) | 3RB... | <input type="checkbox"/> | <input type="checkbox"/> |
|------------------------------------|--|--|------------------------------------|------------------------------------|--------|--------------------------|--------------------------|
| 3 IE2/ | | | | | | | |
| 200 V D/345 V Y 500 V Y | 180-240 V D /310-415 V Y 450-550 V Y | 200...275 V D/345...480 V Y 520...600 V Y | ----- ----- 400 V D ----- | 400 V D ----- ----- ----- | | T T T T | 1 3 6 7 |
| 230 V D/400 V Y 400 V D/690 V Y | 200-260 V D /350-450 V Y 350-450 V D /610-725 V Y | 230...290 V D/400...500 V Y 400...500 V D/690...725 V Y | | | | | |

3) Performance can different if standard motors are used.Please refer to corresponding data sheets.



Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.