


## Data sheet 3RB 550-3




Side channel blower with IE2-motors

IE2




CEC®  
US

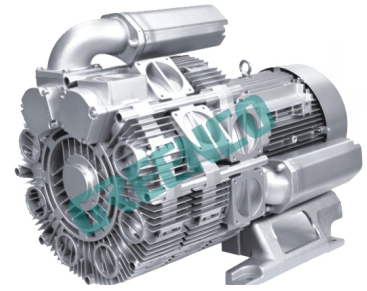

Performance curve for Vacuum pump

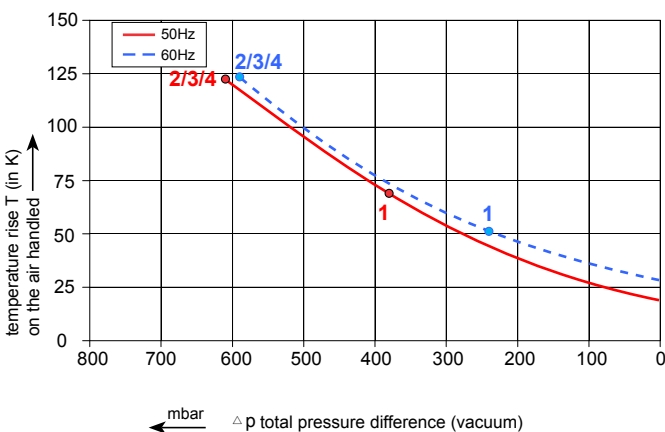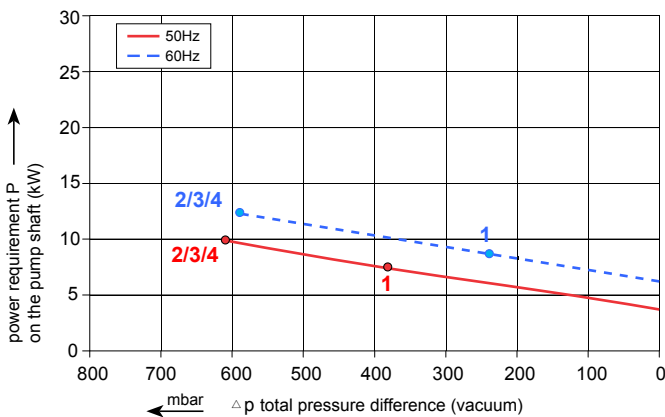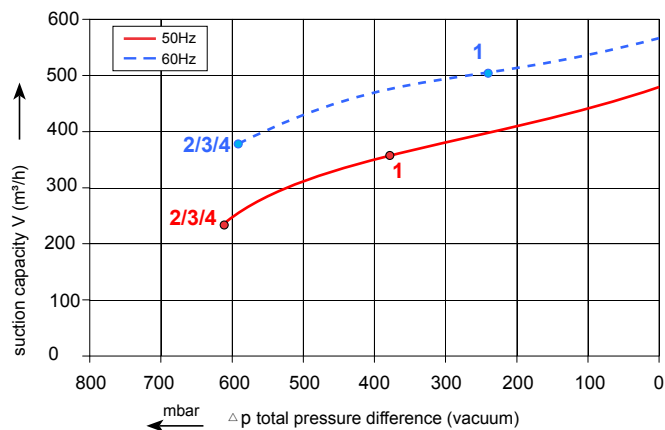

Performance curve for Compressor

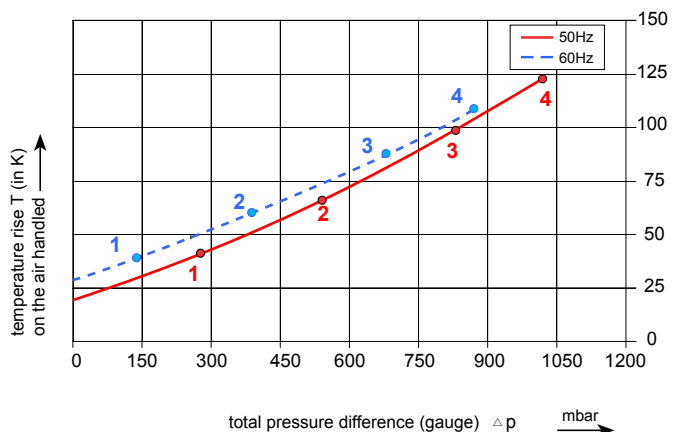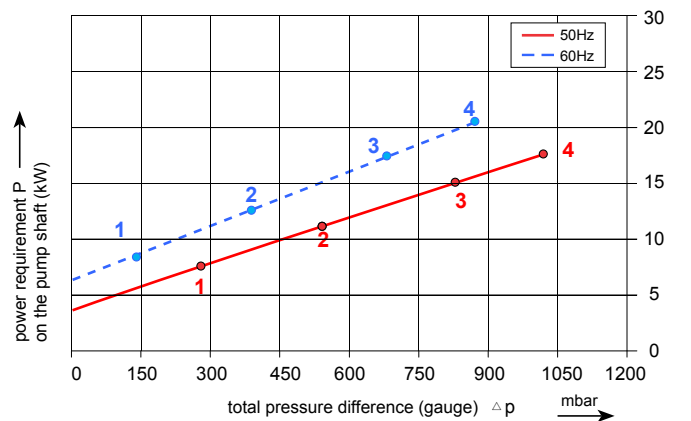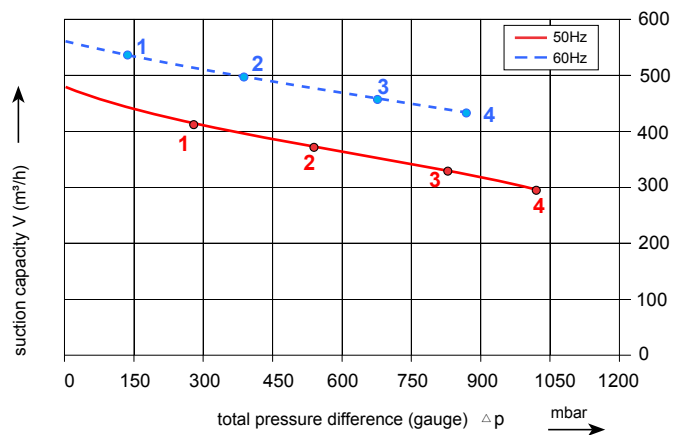

The performance curves are based on air at a temperature of 15 °C and atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each G-3RB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55.

## Selection and ordering data

### Type 3RB 550

Curve No.	Order No.	Frequency	Rated Power	Input voltage		Input current		Permissible total differential pressure <sup>2)</sup>		Sound pressure level <sup>3)</sup>	Weight ca.
				Hz	KW	V	A	Vacuum mbar	Compressor mbar		
<b>3~ 50/60 Hz IP55 insulation material class F</b>											
1	3RB 550-3AAT57	50	7.5	350-450 Δ /610-725Y		15.0 Δ /8.7Y		-380	280	71	142
		60	8.6	400-500 Δ /690-725Y		15.1 Δ /8.8Y		-240	140	77	
2	3RB 550-3AAT67	50	11.0	350-450 Δ /610-725Y		22.0 Δ /12.7Y		-610	540	71	167
		60	12.6	400-500 Δ /690-725Y		22.0 Δ /12.9Y		-590	390	77	
3	3RB 550-3AAT77	50	15.0	350-450 Δ /610-725Y		30.5 Δ /17.3Y		-610	830	71	180
		60	17.3	400-500 Δ /690-725Y		29.5 Δ /17.0Y		-590	680	77	
4	3RB 550-3AAT87	50	18.5	350-450 Δ /610-725Y		37.0 Δ /21.0Y		-610	1020	72	195
		60	21.3	400-500 Δ /690-725Y		36.5 Δ /21.0Y		-590	870	76	

1) Relief valves available for limiting differential pressure.

2) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance  $\pm 3$  dB(A).

All 3RB fulfil the 2006/42/EC(machinery)and 2006/95/EC(low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".


The motors comply with EN 60 034-1 / -2 /-30(IEC 60034) and thermal class F

The voltage tolerance is +/- 5%.

The frequency tolerance is +/- 2% maximum.

Other voltage ranges						
50 Hz	50 Hz Voltage range	60 Hz Voltage range	86 Hz(5000 rpm)	100 Hz(6000 rpm)	3RB...	
3 IE2/						
200 V D/345 V Y 500 V Y 230 V D/400 V Y 400 V D/690 V Y	180-240 V D /310-415 V Y 450-550 V Y 200-260 V D /350-450 V Y 350-450 V D /610-725 V Y	200...275 V D/345...480 V Y 520...600 V Y 230...290 V D/400...500 V Y 400...500 V D/690...725 V Y	----- ----- 400 V D -----	400 V D ----- ----- -----		T T T T
						1 3 6 7

3) Performance can different if standard motors are used. Please refer to corresponding data sheets.

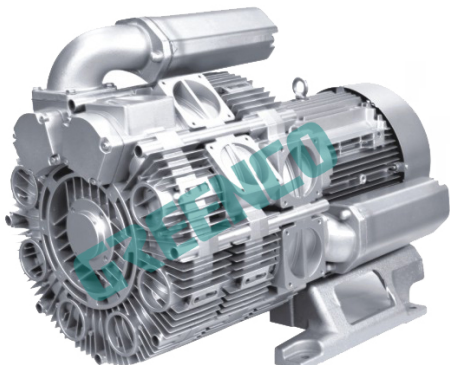

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.

**GREENCO**®

Your Ultimate Source for Vacuum and Pressure

**ZHEJIANG GREENCO INDUSTRY CO LTD**  
Rongshi Road Danya Industrial Zone Zeguo  
Town Wenling 317523 China  
Tel.: +86-576-86428999  
Fax: +86-576-86409555  
www.greenco.cn  
E-mail:greenco@greenco.cn